


APQ



		APQ 200M	APQ 300M	APQ 300T	APQ 300/12M	APQ 500T	APQ 500/12T
A	mm	530					
B	mm	360					
C	mm	380					

Model	Modèle	Modelo	
Safe working load	Portée nominale	Capacidad nominal	kg
Weight of the hoist	Poids du treuil	Masa del órgano	kg
Lifting speed	Vitesse de levage	Velocidad de elevación	m/min
Electric motor	Moteur électrique	Motore eléctrico	
Power	Puissance	Potencia	kW
Voltage	Voltage	Tensión	V
Frequency	Fréquence	Frecuencia	Hz
Current intensity	Intensité du courant électrique	Intensidad de corriente	A
Rotor shaft angular speed	Vitesse de rotation de l'arbre	Velocidad de rotación del árbol	rpm
Reduction ratio	Rapport de réduction	Relación de reducción	
Ø non-rotating wire rope	Ø du câble acier antigiratoire	Cable de acero antigiratorio Ø	mm
Length of the rope	Longueur du câble	Longitud del cable	m
Maximum length of the rope	Longueur max du câble	Longitud máxima del cable	m

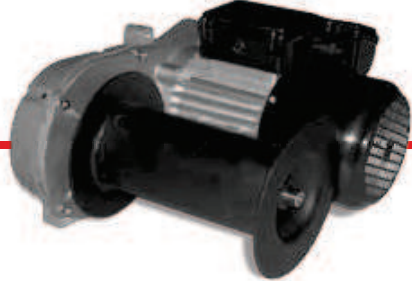

	APQ 200M	APQ 300M	APQ 300T	APQ 300/12M	APQ 500T	APQ 500/12T		الطراز
	200	300	300	300	500	500	كجم	حمل التشغيل الامن
	60	63	62	63	66	66	كجم	وزن الرافعه
	21	21	21	12	21	12	م/دقيقه	سرعه الدفع
	singlephase	singlephase	threephase	singlephase	threephase	threephase		موتور كهرباء
	0,75	1,45	1,85	1,45	2,2	2,2	كيلو وات	القدره
	230	230	230/400	230	230/400	230/400	ف	الفولت
	50	50	50	50	50	50	هرتز	التردد
	6,5	8	8/4,5	8	11,5/6	11,5/6	امبير	شده التيار
	1400	1400	1400	1400	1400	1400	لفه/دقيقه	عدد لفات الموتور
	1:25,5	1:25,5	1:25,5	1:41,3	1:25,5	1:41,3		معامل التخفيض
	5	6	6	6	7	7	مم	قطر السلك
	25	25	25	25	25	25	م	طول السلك
	40	40	40	40	40	40	م	الطول الأقصى للسلك